


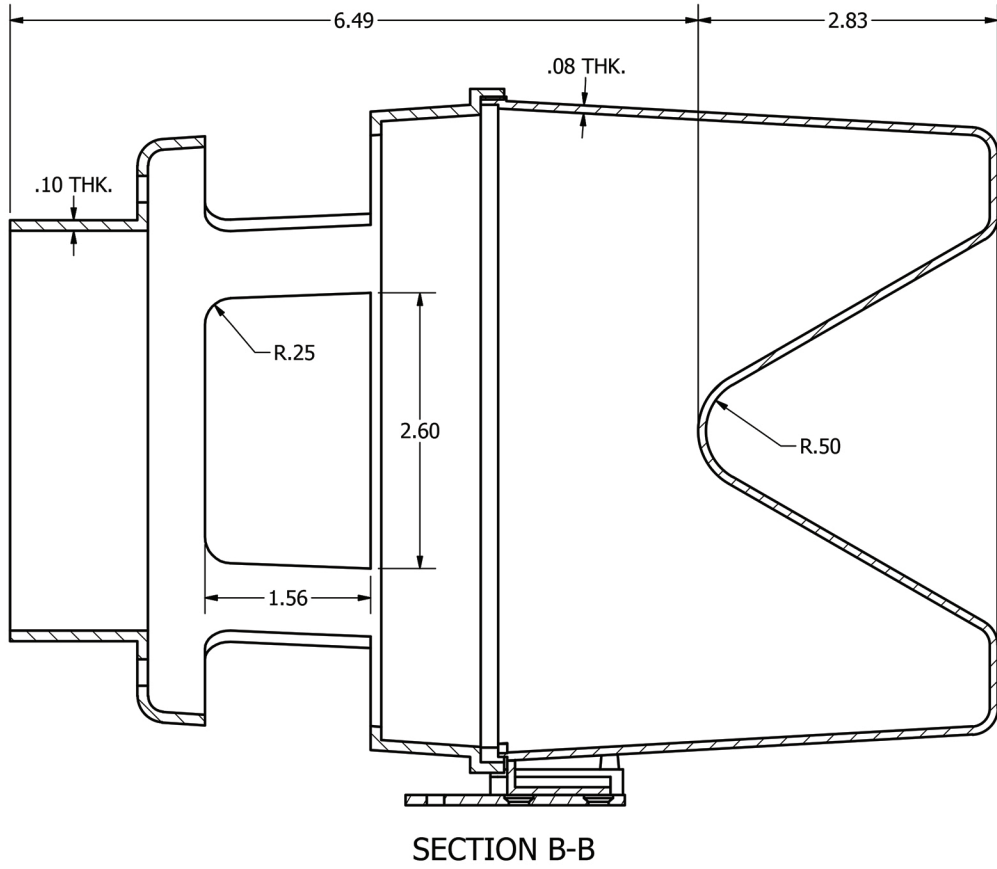
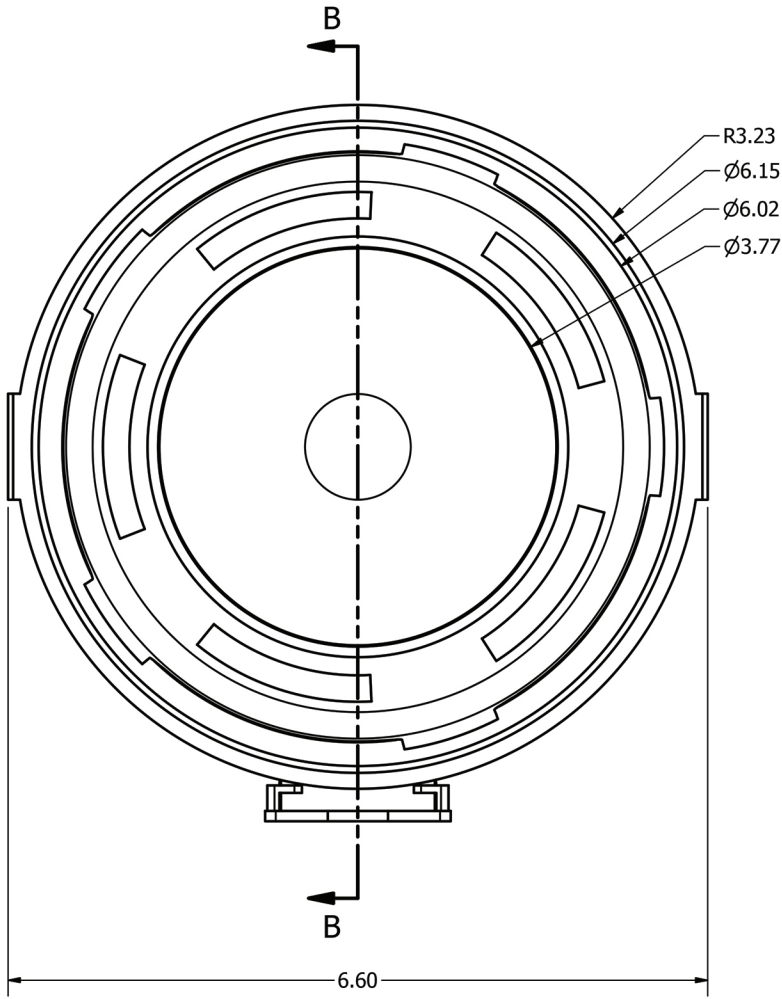
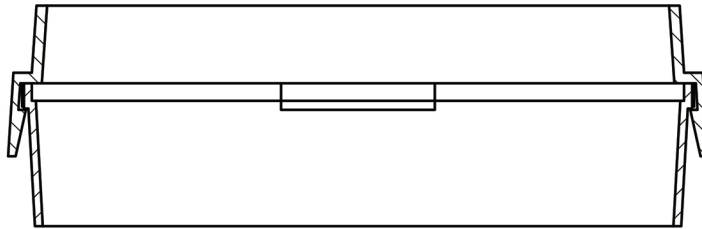
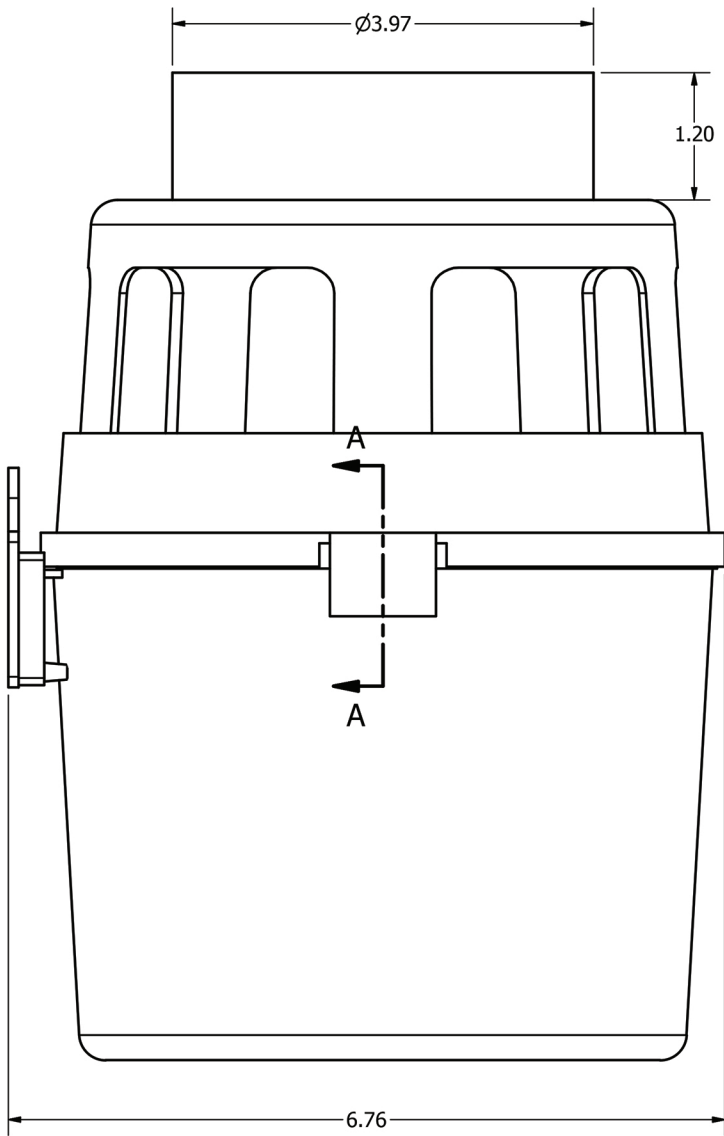


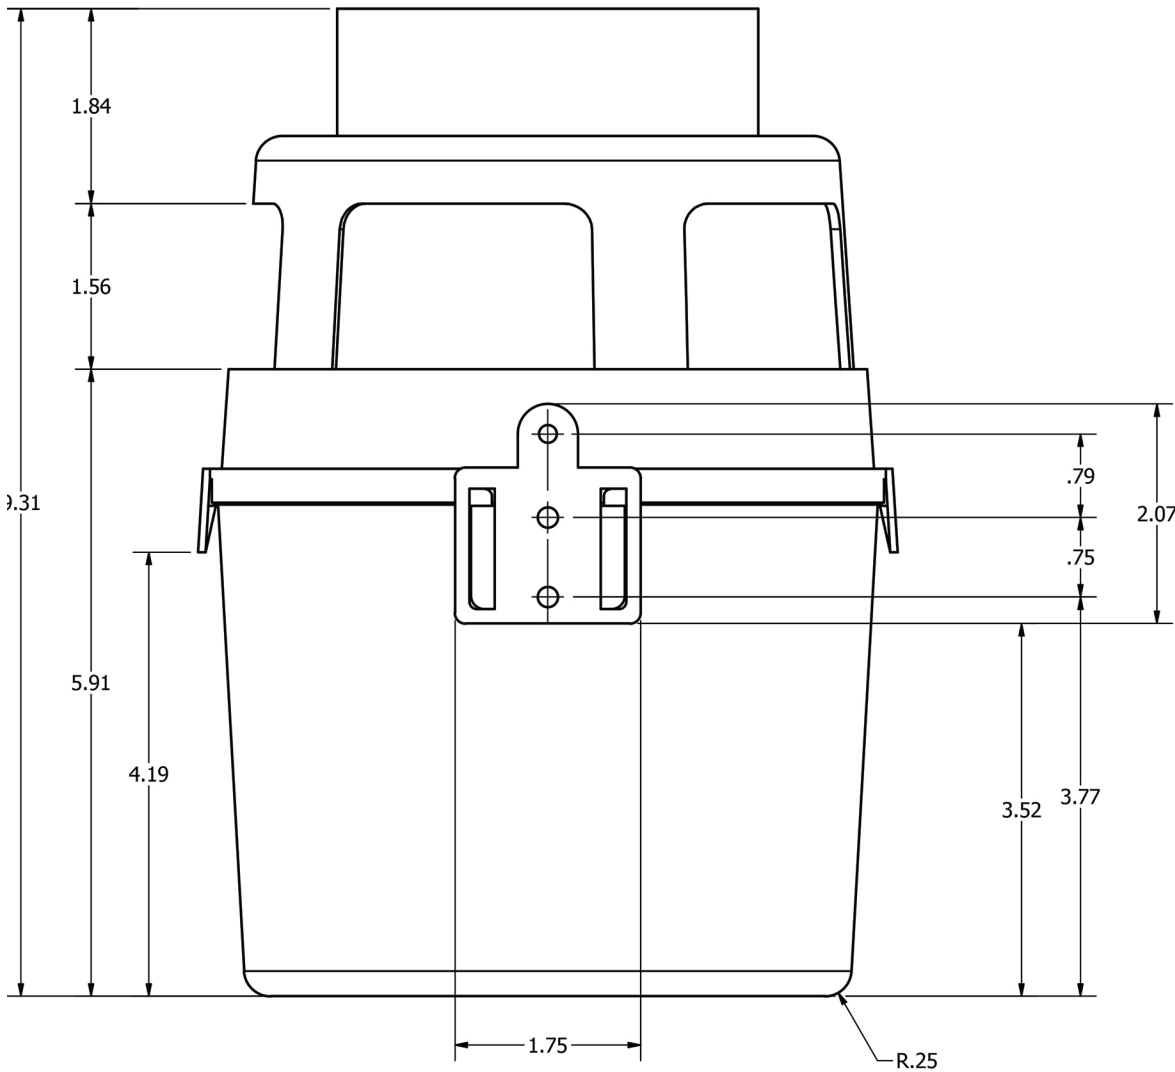

SECTION B-B

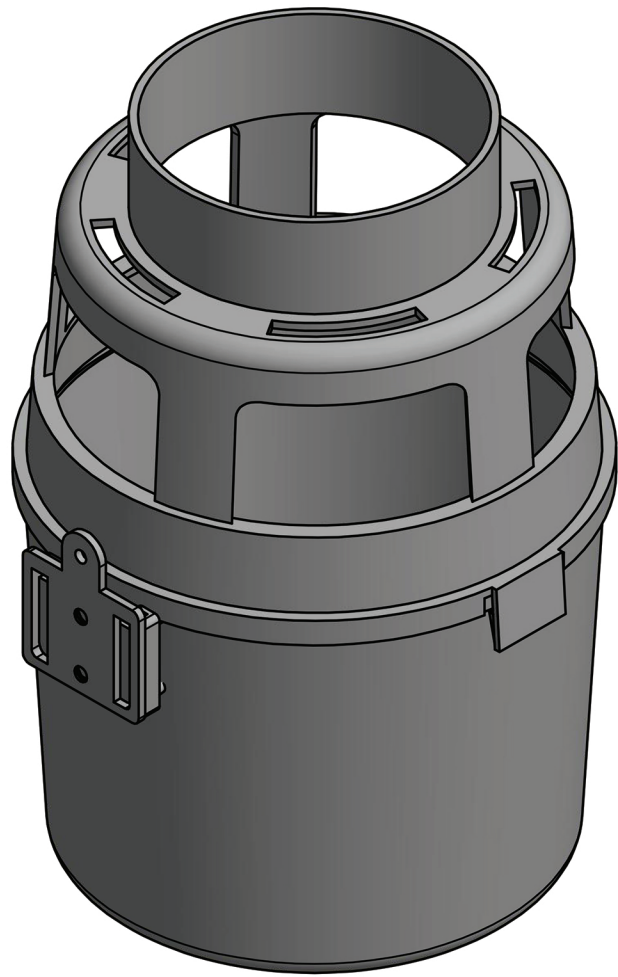

SECTION A-A

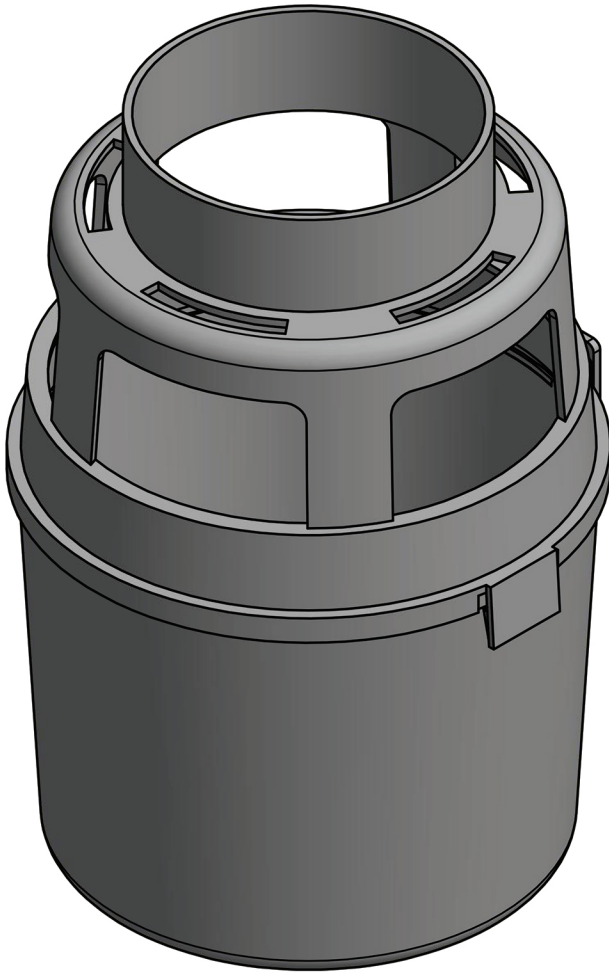

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES	DRAWN		
		TOLERANCES:	CHECKED		
		FRACTIONAL: 1/16	ENG APPR.		
		ANGULAR: MACH ± 1° BEND ± .01	MFG APPR.		
		TWO PLACE DECIMAL ±0.01	Q.A.		
		THREE PLACE DECIMAL ±0.005	COMMENTS:		
		INTERPRET GEOMETRIC TOLERANCING PER:			
		MATERIAL			
		FINISH			
NEXT ASSY	USED ON				
APPLICATION		DO NOT SCALE DRAWING			

 Lambro Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 4" Lint Trap Bucket
Top, Bottom, and Wall Bracket

Made of polymer resin material

SIZE	DWG. NO.	REV
	C 1414	
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1



LAMBRO INDUSTRIES, INC.

Ventilation Accessories Since 1967

FOIL FLEX

UL 2158A CLOTHES DRYER TRANSITION DUCT

Check with local building codes prior to installation.

Product: UL 2158A Clothes Dryer Transition Duct

Description: Non-Insulated foil flexible duct reinforced with galvanized wire.

Construction: Multiple layers of aluminum / polyester laminate tape formed into a flexible duct bonded with premium heat cured fire retardant adhesive supported by a galvanized wire helix with a wire pitch of 1 inch.

Components:

- Aluminum / Polyester laminate
- Hot galvanized zinc coated bead wire - 0.0393 inch diameter
- UL approved fire-retardant water-based adhesive

Specifications:

- Wire pitch: 1 inch
- Duct Diameter: 4 inch

Properties:

Certified UL2158A - Conforms to all requirements of UL2158A for clothes dryer transition ducts.

- Operating temperature: -86°F to +257°F
- Maximum working pressure: +3000PA
- Resists tearing and puncturing

NOTE: Per UL 2158A, only ducts 8 foot lengths or less can be UL marked and installed.