

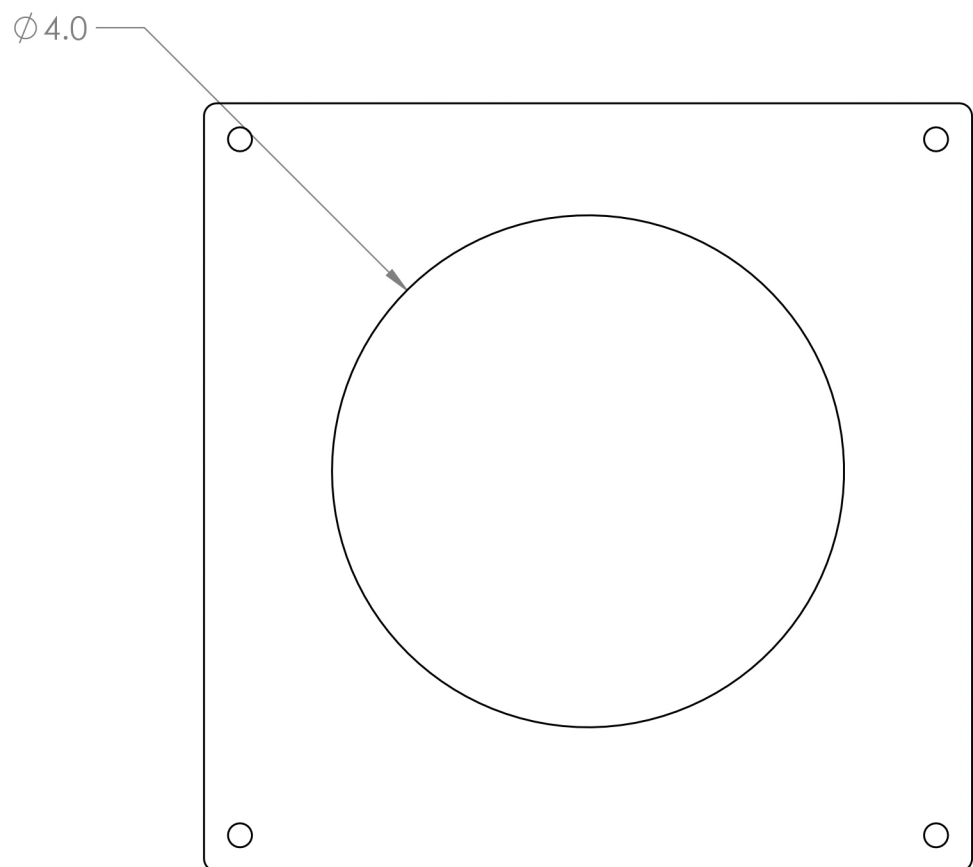
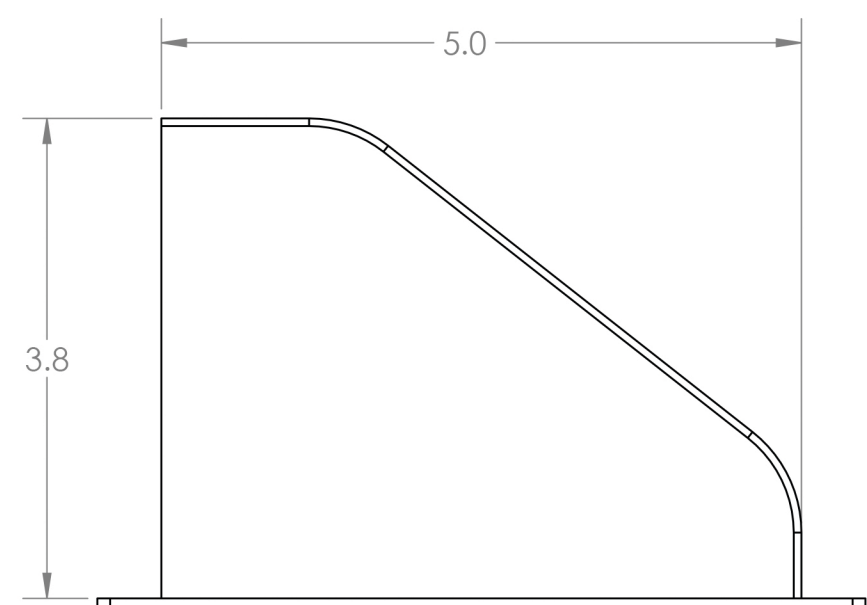
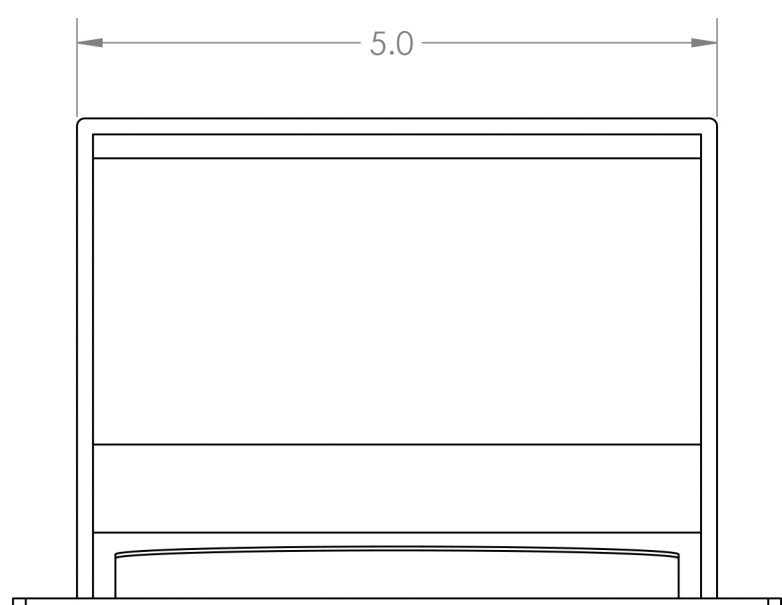


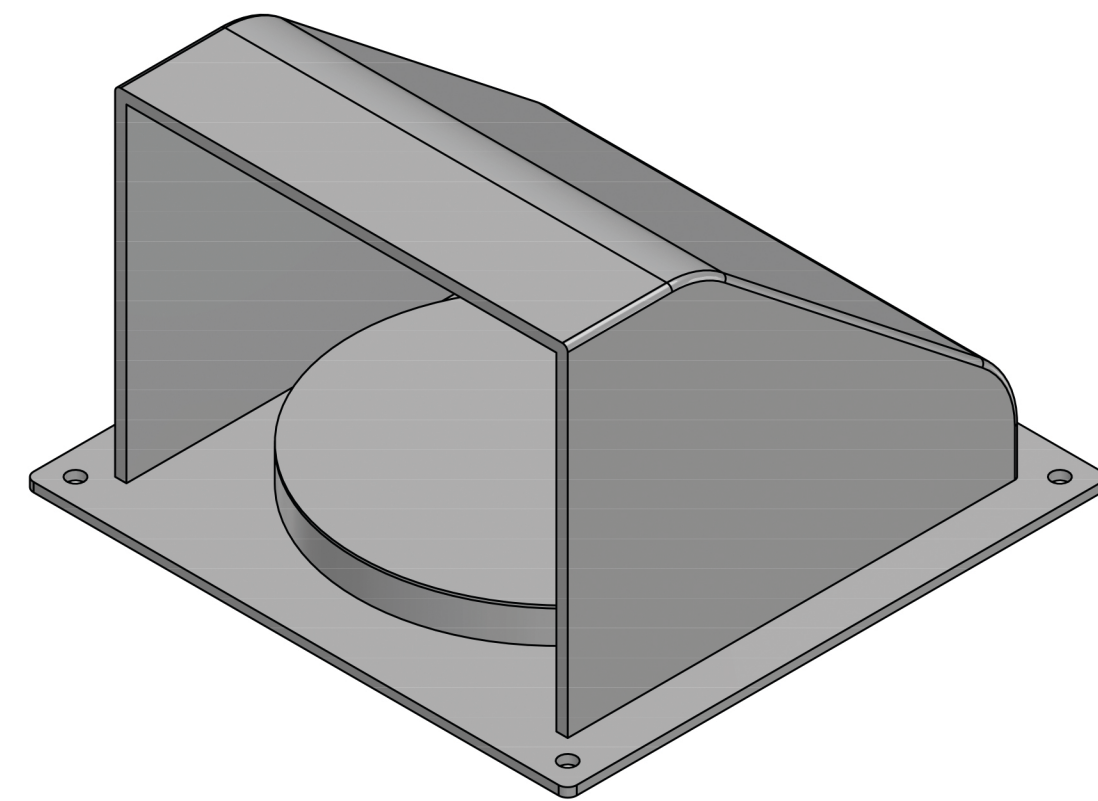

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:			NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± 1° BEND ± .01 TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005		DRAWN		
		CHECKED		
		ENG APPR.		
		MFG APPR.		
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.		
MATERIAL		COMMENTS:		
FINISH		Net Free Area (NFA)		
NEXT ASSY	USED ON	Without Screen: 17 sq. in.		
APPLICATION		With Screen: 12.5 sq. in.		
		Spring Controlled Damper		

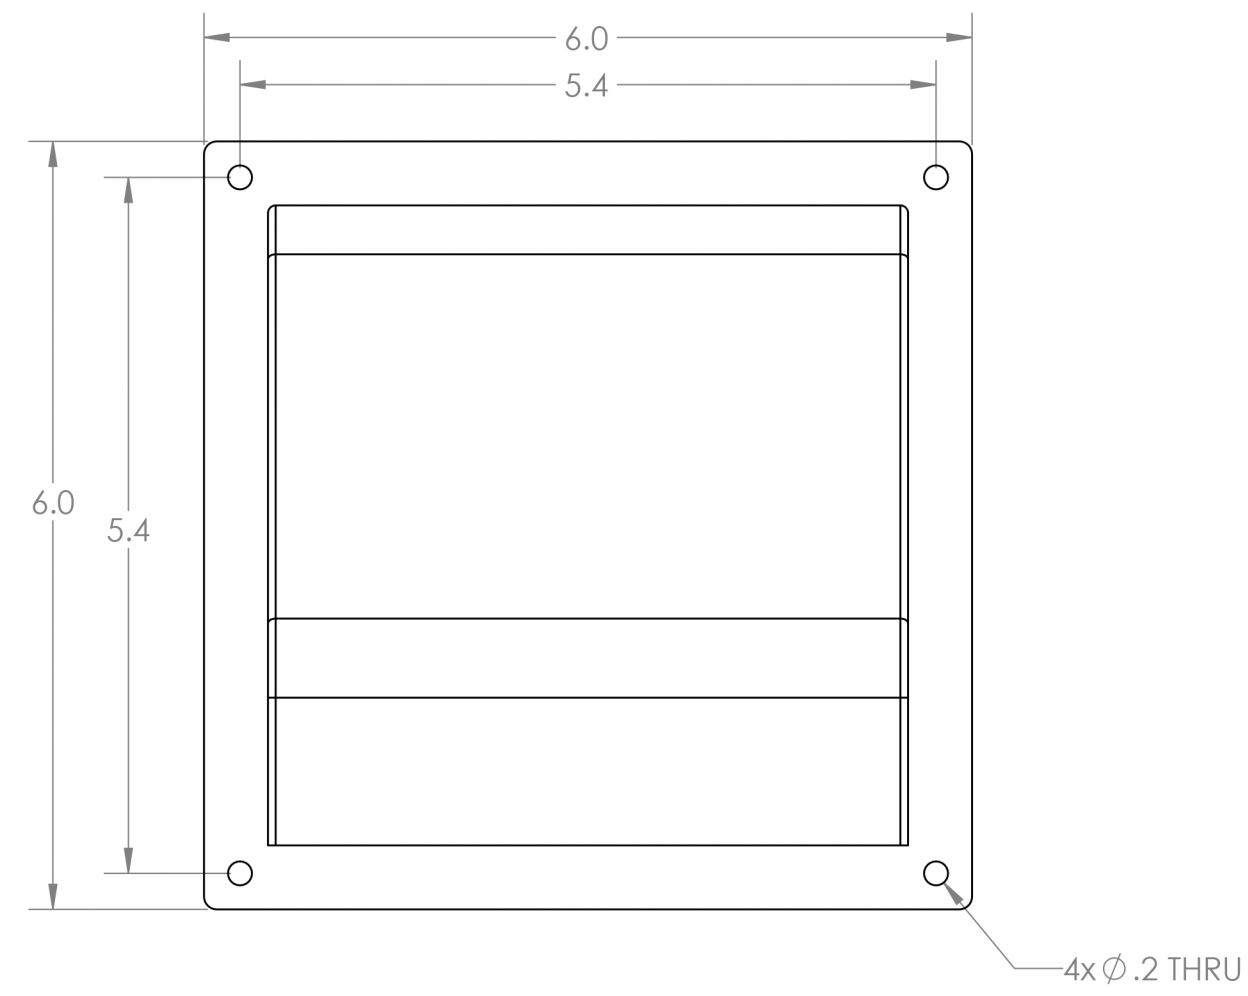

Lambro Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 4" Plastic Wall Exhaust Hood Vent
Flat Flange - Spring Damper - Flush Mount
Made of polymer resin material with UV inhibitor
used to help prevent the premature fading of vent

SIZE	DWG. NO.
C	1471WNS-FF-NC-SPG
SCALE: 1:1.5	WEIGHT: SHEET 1 OF 1