

D

C

B







A

D

C

B

A

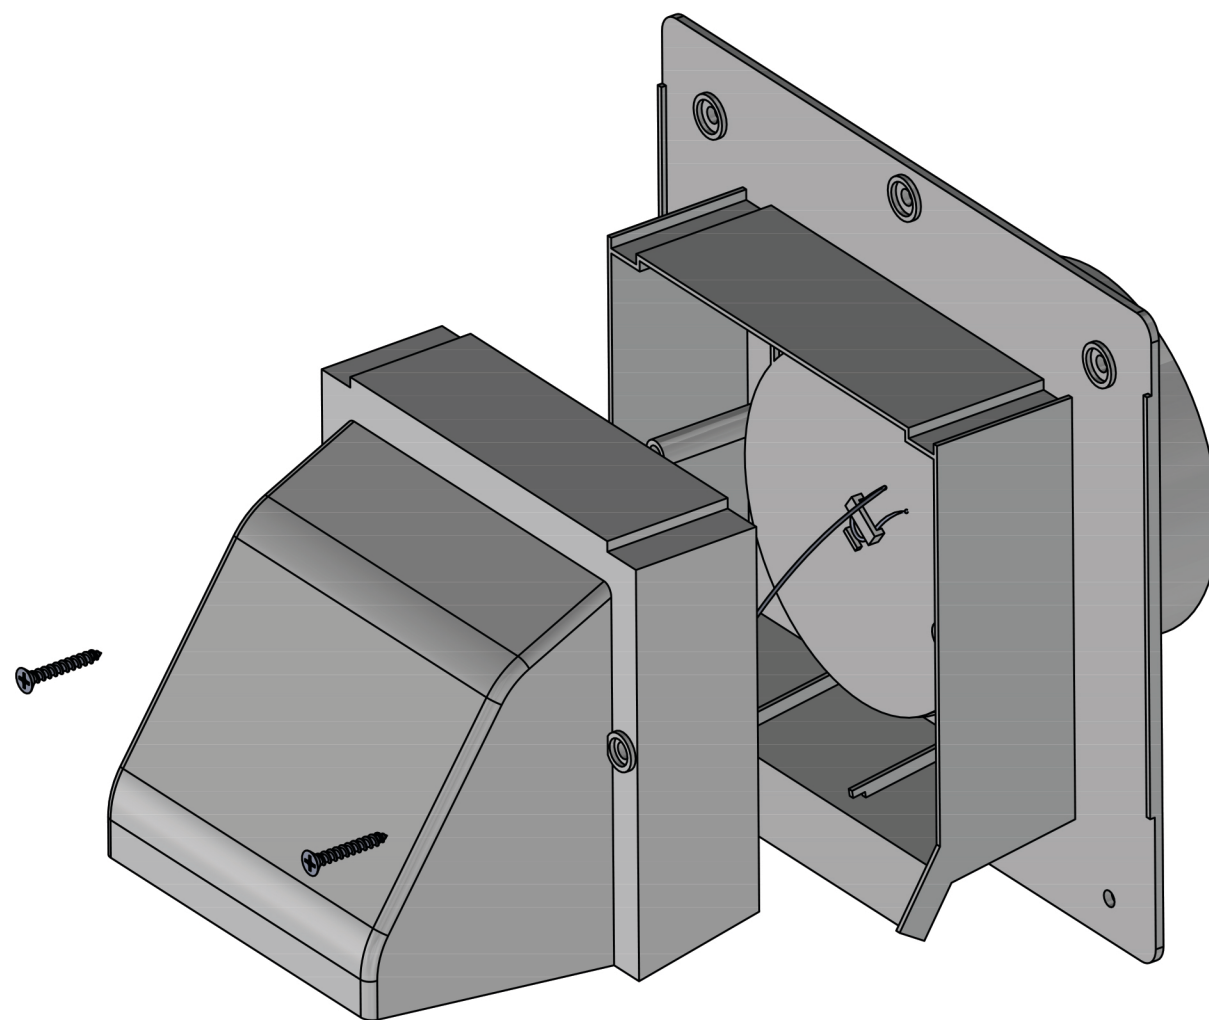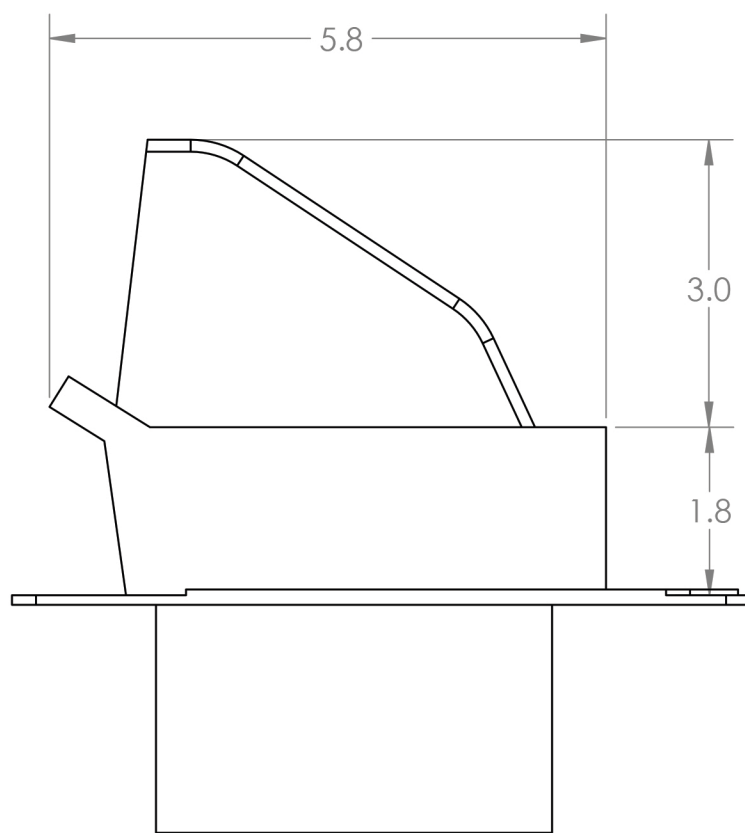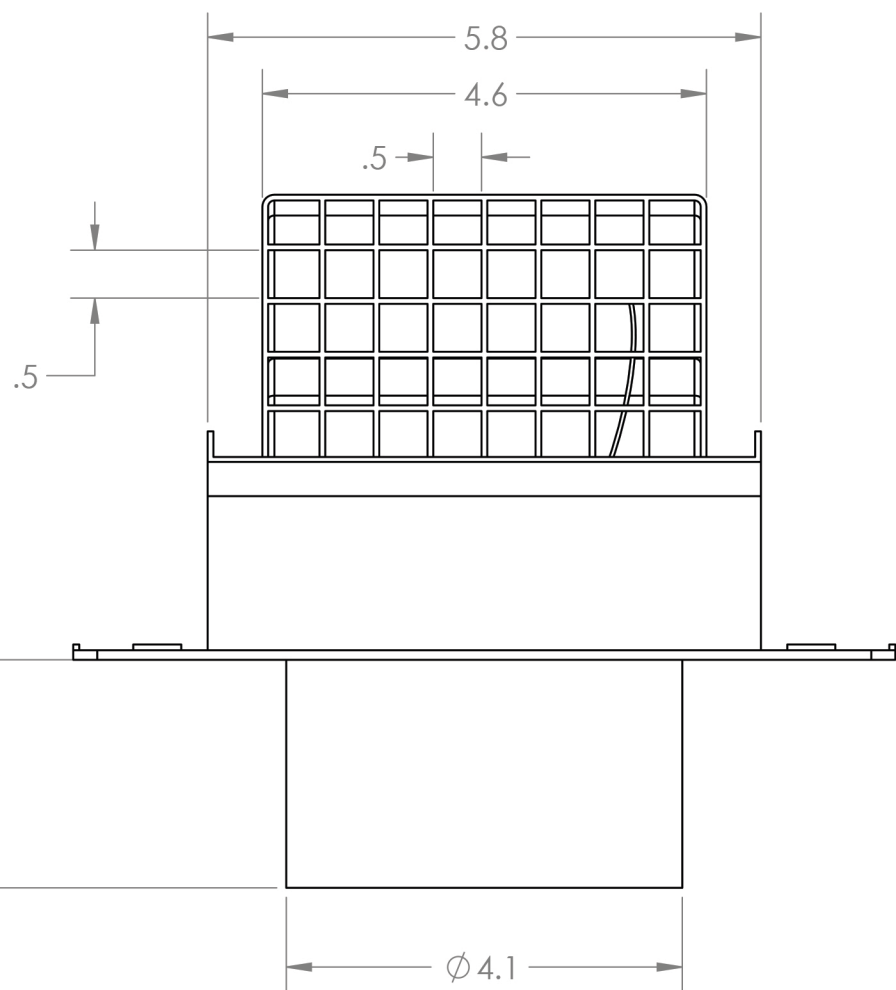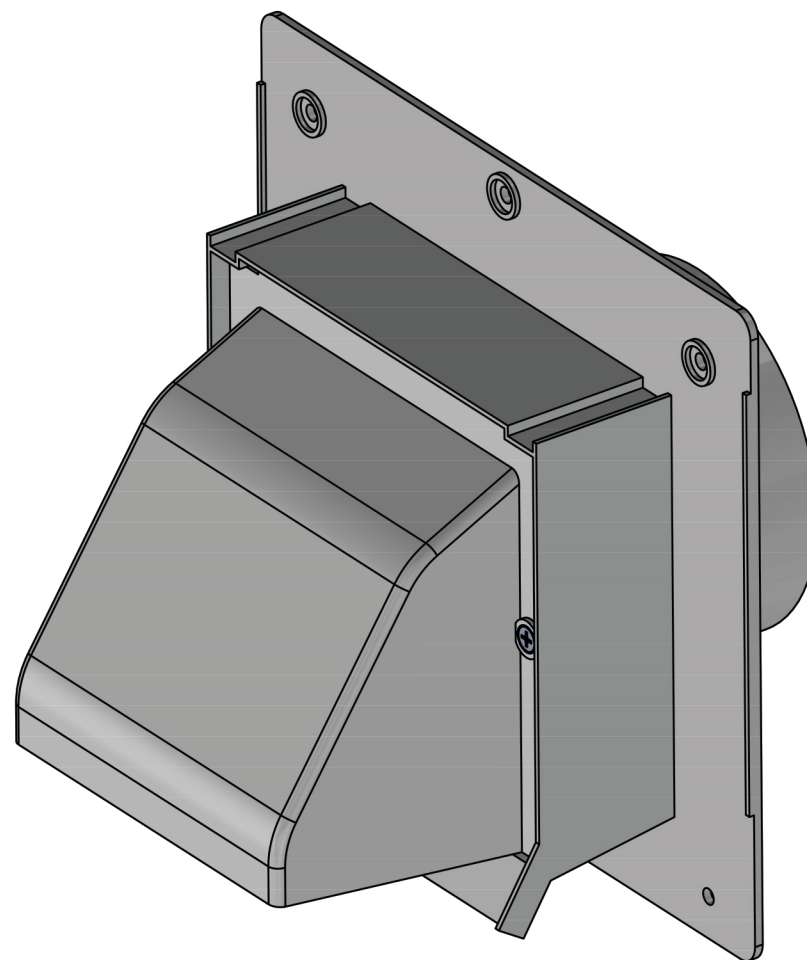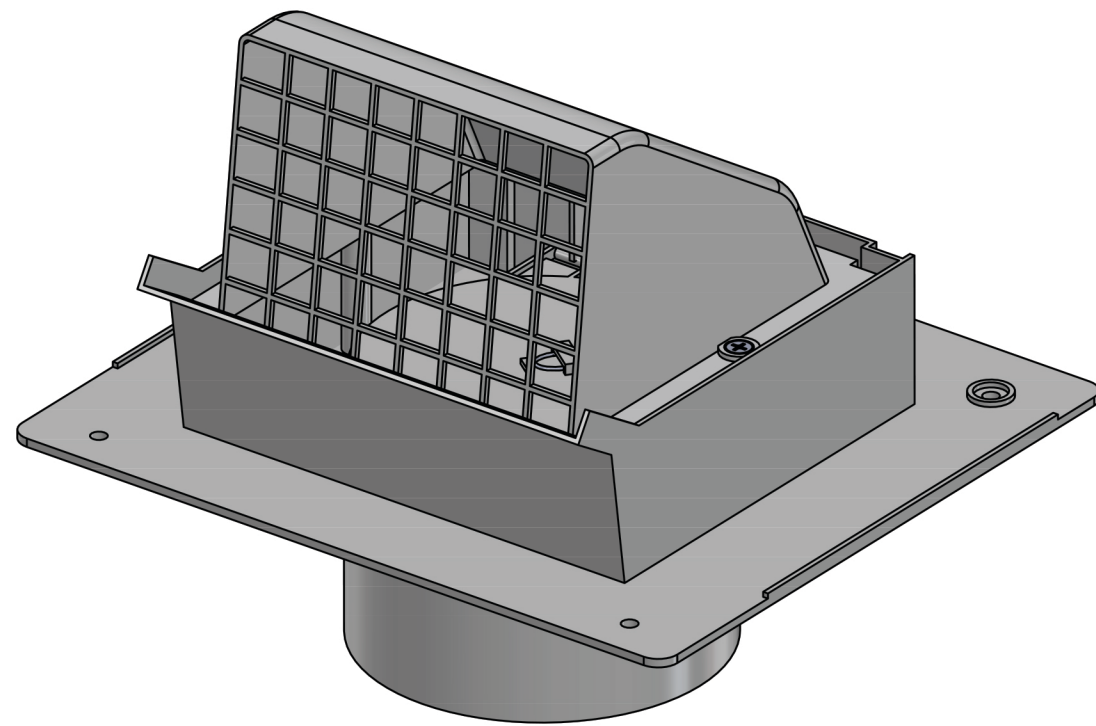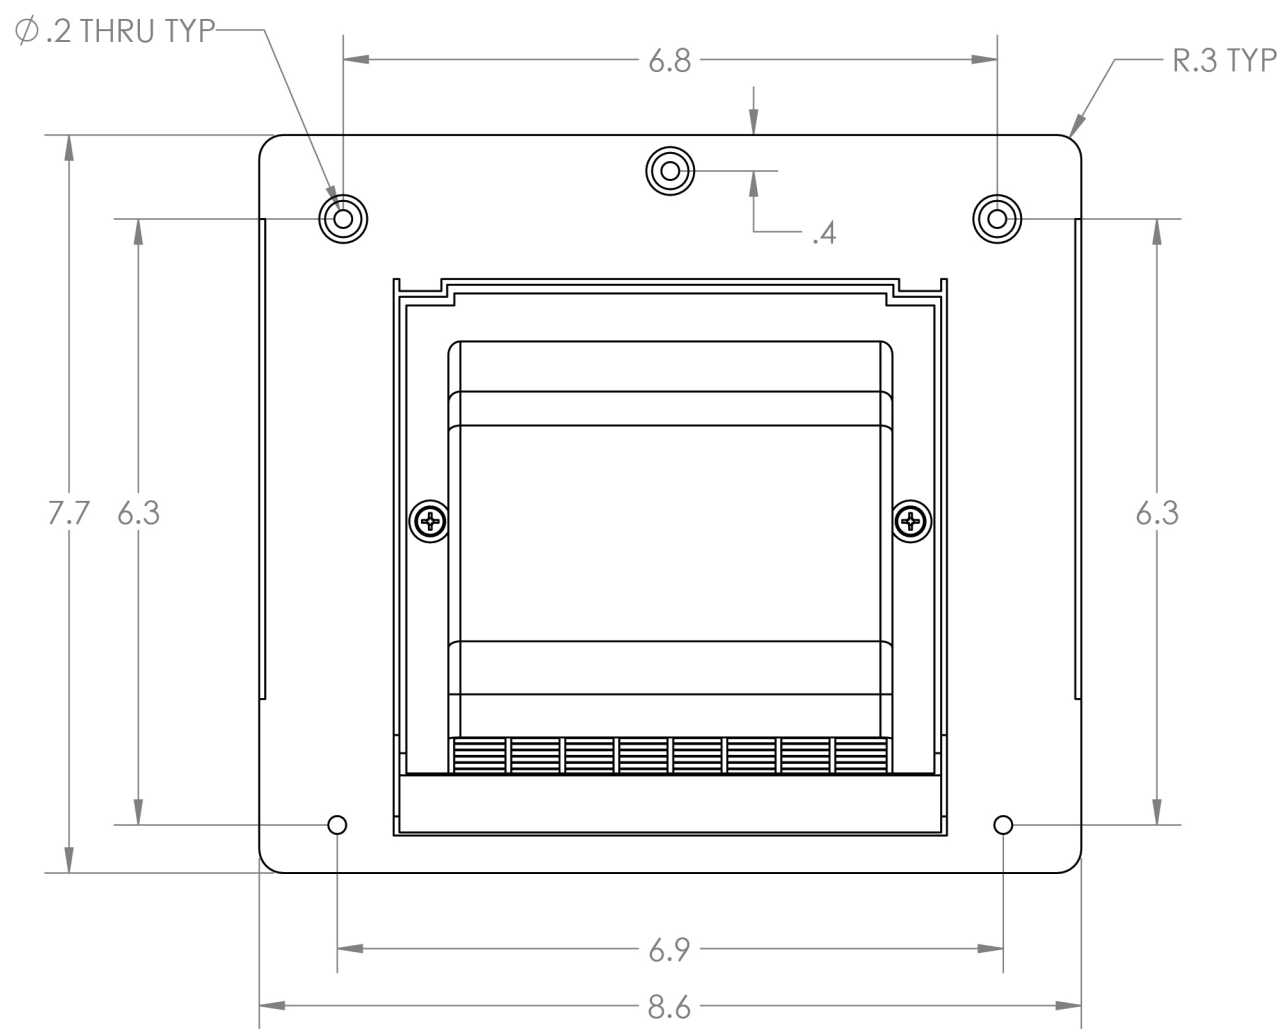

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:			NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± 1° BEND ± .01 TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	NEXT ASSY	USED ON	DRAWN	
			CHECKED	
			ENG APPR.	
			MFG APPR.	
INTERPRET GEOMETRIC TOLERANCING PER:			Q.A.	
MATERIAL			COMMENTS:	
FINISH			Net Free Area (NFA)	
APPLICATION			Without Screen: 14 sq. in.	
			With Screen: 11.5 sq. in.	
			Spring-Controlled Damper	
			DO NOT SCALE DRAWING	

LAMBRO Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 4" Plastic Wall Exhaust/Intake Hood Vent
Spring-Controlled Damper
Fixed Screen - 2.4" Collar
Made of polymer resin material with UV inhibitor
used to help prevent the premature fading of vent

SIZE	DWG. NO.	REV
C	1471WS-2P	
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1