

4 3 2 1

D

C

B







A

D

C

B

A

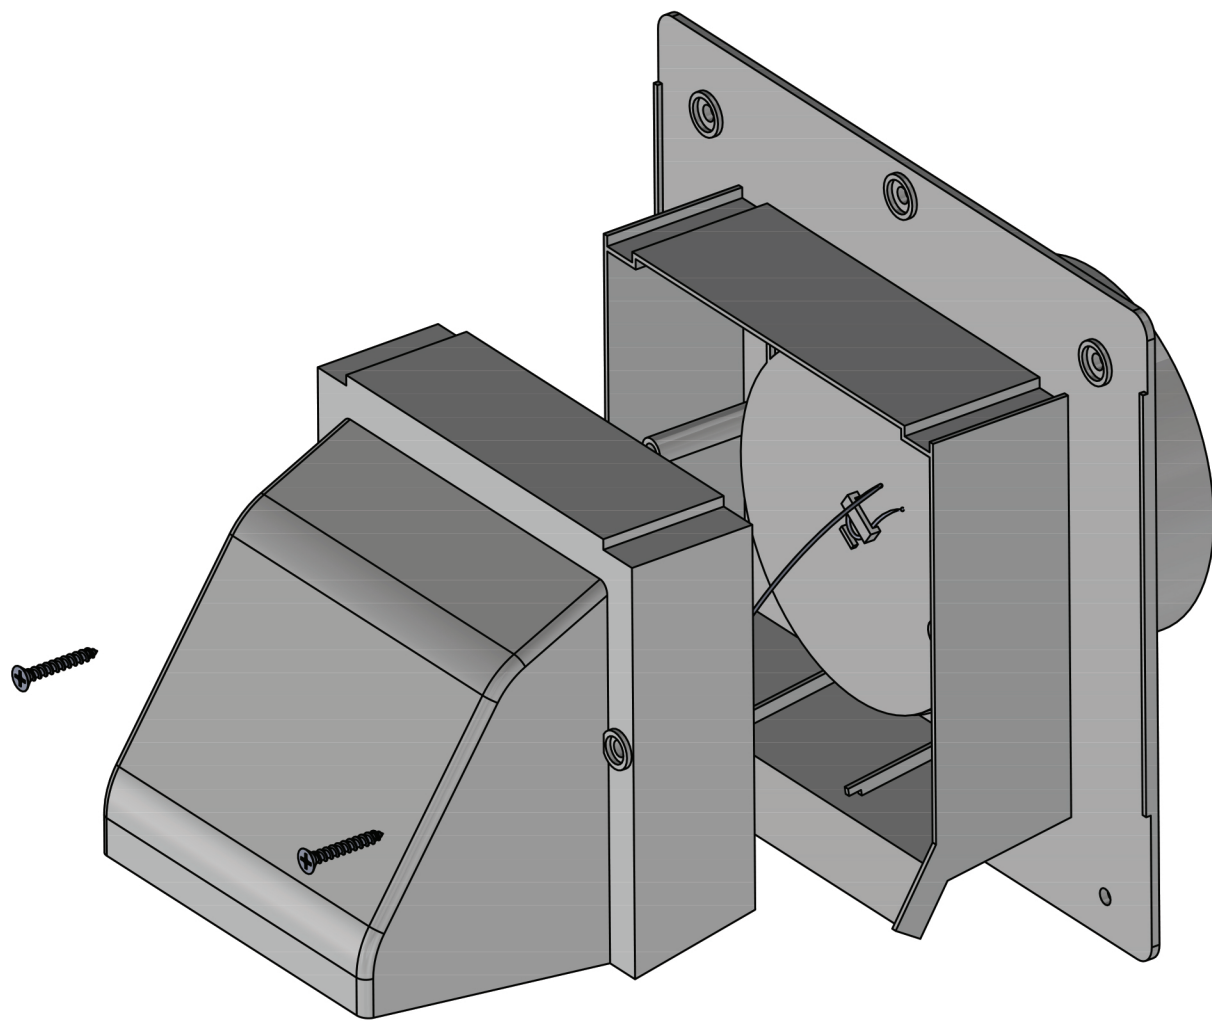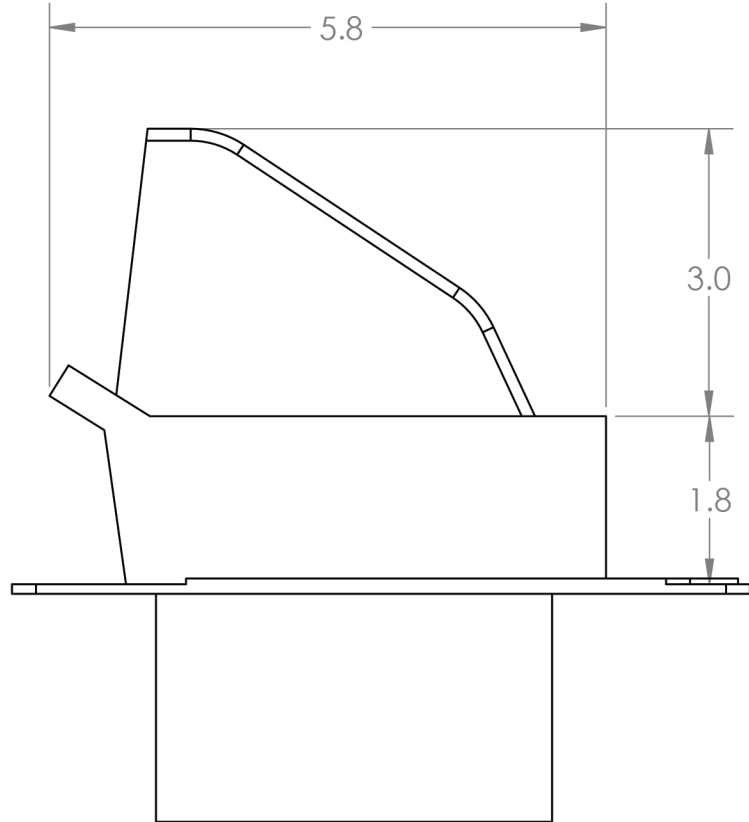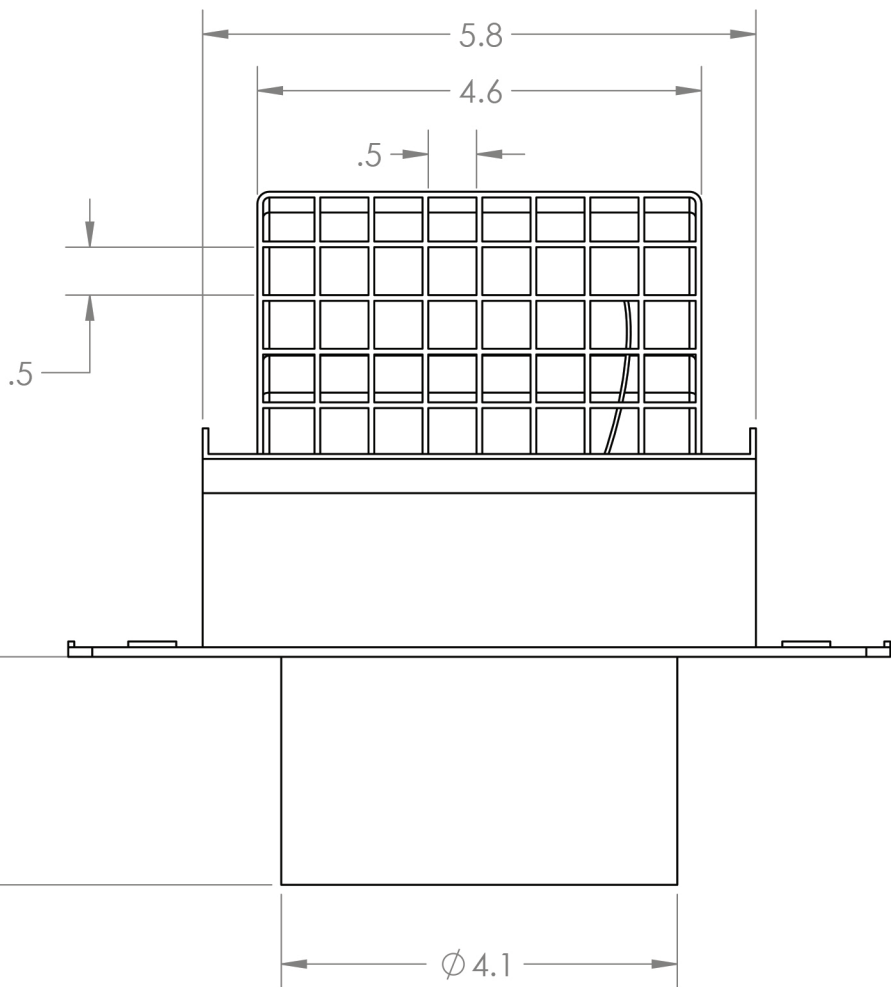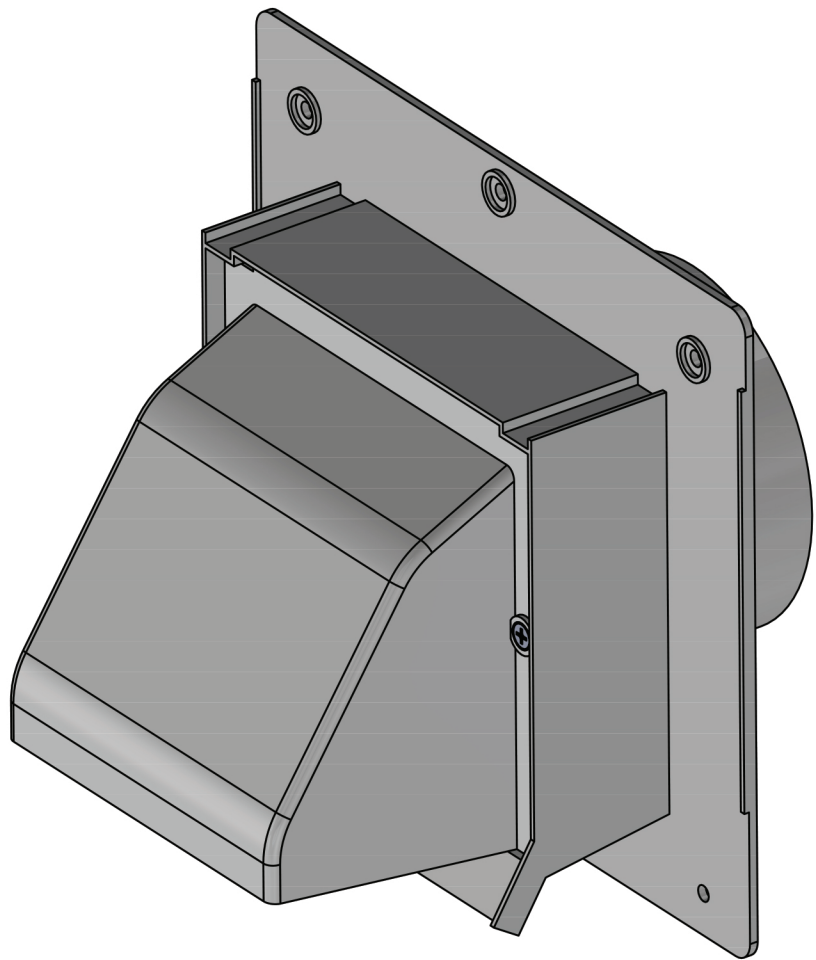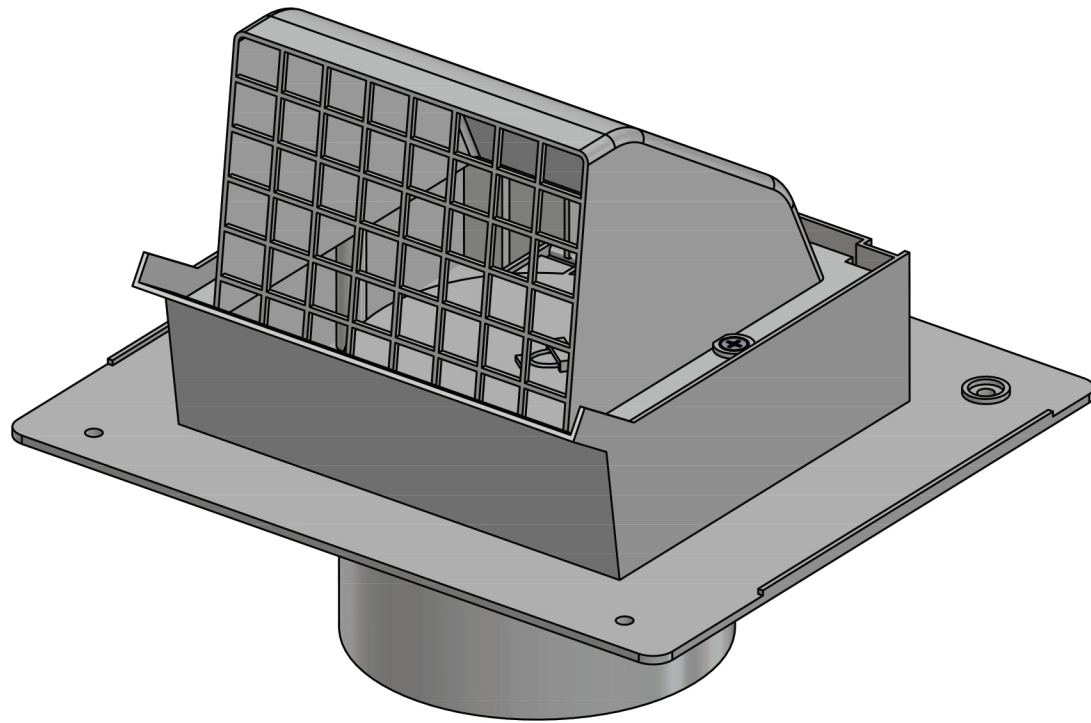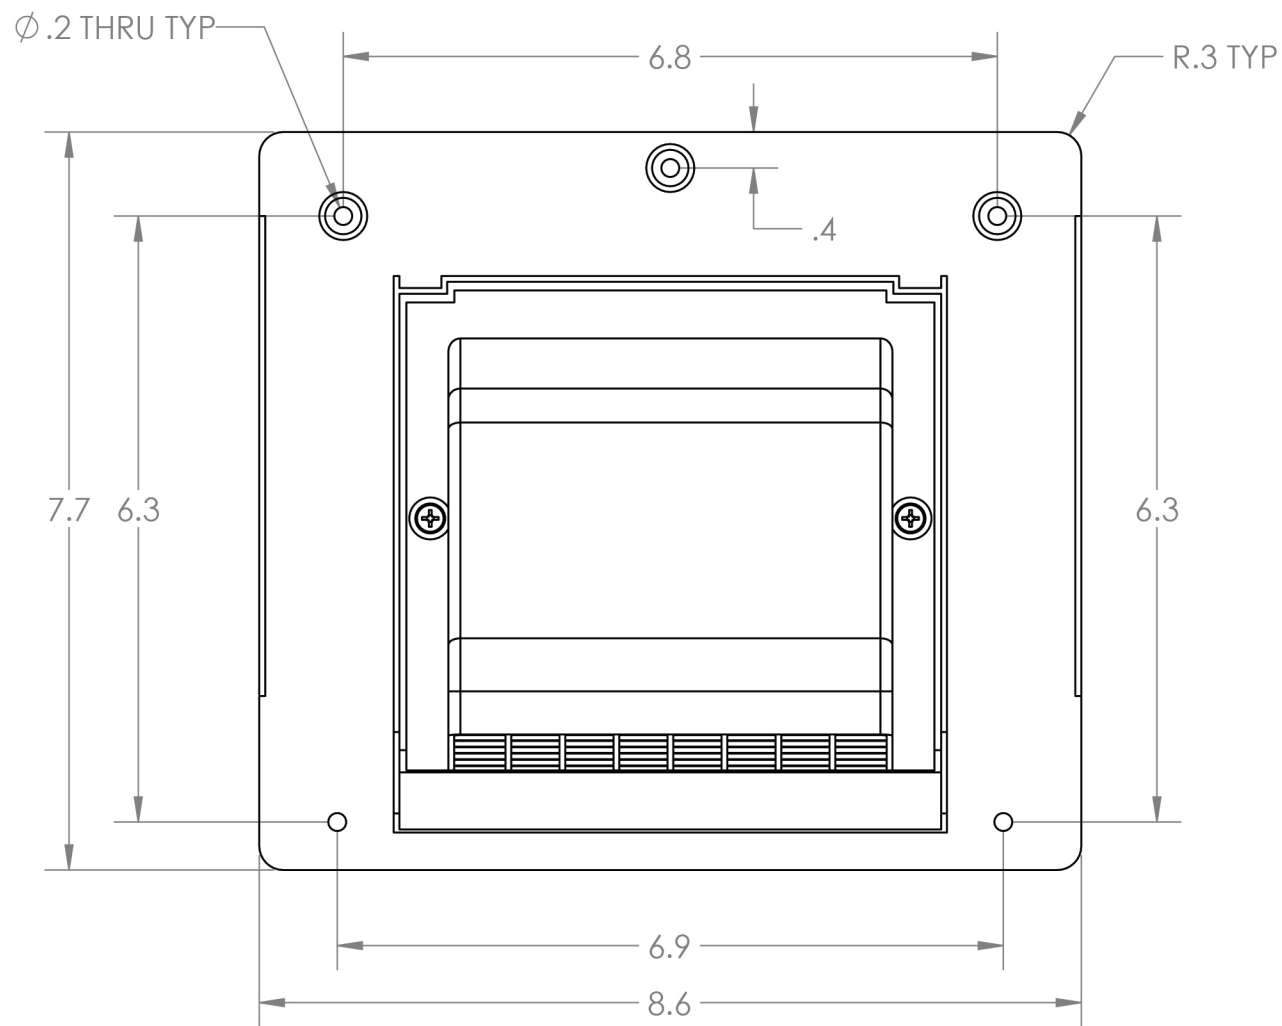

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LAMBRO. ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LAMBRO IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± 1° BEND ± .01 TWO PLACE DECIMAL ± 0.01 THREE PLACE DECIMAL ± 0.005	FINISH		
	APPLICATION		
	DO NOT SCALE DRAWING		
INTERPRET GEOMETRIC TOLERANCING PER:		Q.A.	
MATERIAL		COMMENTS:	
NEXT ASSY		USED ON	
		Net Free Area (NFA)	
		11.5 sq. in.	
		Stainless Steel Screws	
		Spring-Controlled Damper	

LAMBRO Industries, Inc.
115 Albany Ave.
Amityville, NY 11701
(631) 842-8088
www.lambro.net

TITLE: 4" Plastic Wall Exhaust/Intake Hood Vent
Spring-Controlled Damper - 0.75" Drip Edge
Fixed Screen - 2.4" Collar

Made of polymer resin material with UV inhibitor
used to help prevent the premature fading of vent

SIZE DWG. NO. REV
C 1471WS-2P

SCALE: 1:2 WEIGHT: SHEET 1 OF 1